

Model BTS

Automatic attachment/detachment type, a wide range of stone sizes can be handled with a single clamp

Special clamps Clamps for stone

Model BTSW



Application


Lifting, transporting, landing and removing

Materials that can be handled


Rocks, gravestones, garden stones, stones for building, stones for civil engineering and all other types of stones

Features


- With an automatic attachment/detachment device
- No marks are left on the stone because the clamp uses urethane rubber presser pads
- Since the opening section can be adjusted by changing the presser foot position (move the pin) to accommodate a stone's thickness, a single clamp can handle a wide range of stone sizes... Model BTSW




Specifications

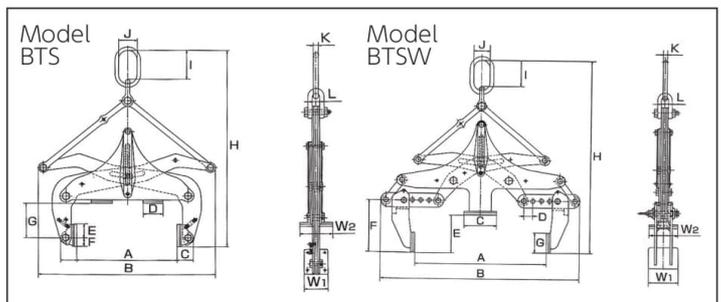

Precautions for use * Multiple point lifting is not allowed.




1. Open the opening section: Land a clamp whose legs are closed, and then lift it. (Opening)



2. Attach the clamp: Place the clamp over an object to be lifted. Let it rest the object. Lift the clamp slowly while checking that the object remains inserted in the clamp.



3. Lifting and transporting: Check for safe conditions when the object is lifted off.



4. Remove the clamp: Land the object and lower the crane until the slings are slackened. Once there is no load on the clamp, lift the clamp slowly.(Opening)

Table of Dimensions (Model : BTS/BTSW)

Code No.	Model	W.L.L. Min~Max (kg)	Adapted measurement A (mm)	Dimensions (mm)													Product weight (kg)
				B	C	D	E	F	G	H	I	J	K	L	W1	W2	
34930335	BTS-300(240-335)	60~300	240~335	590(max)	53	70	45	30	115	610~866	96	60	13	24	72	100	13.1
34930456	BTS-300(360-455)	60~300	360~455	580(max)	53	70	45	30	115	688~961	96	60	13	24	72	100	14.9
34930455	BTSW-300	60~300	212~455	729(max)	120	30.3	136.5	189.5	72	697~925	96	60	13	24	100	100	17.7

○The specifications, dimensions and paint colors are subject to change without prior notice.